




LINEAR S
(Linear Single)

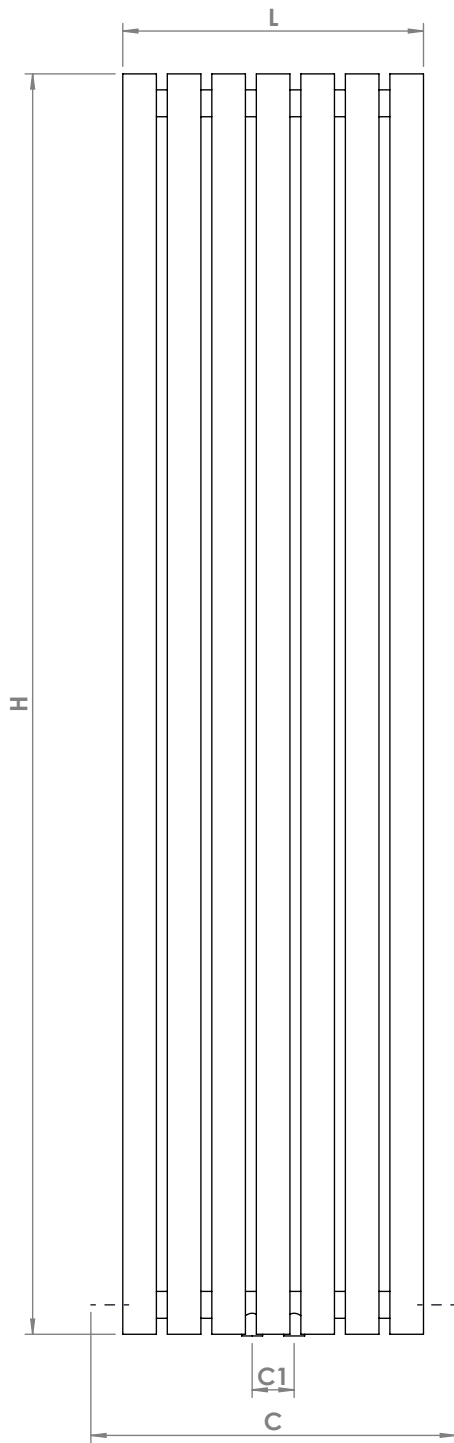

Front View

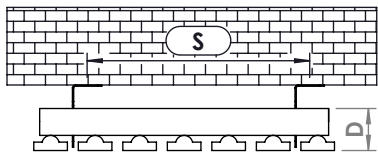


Top View

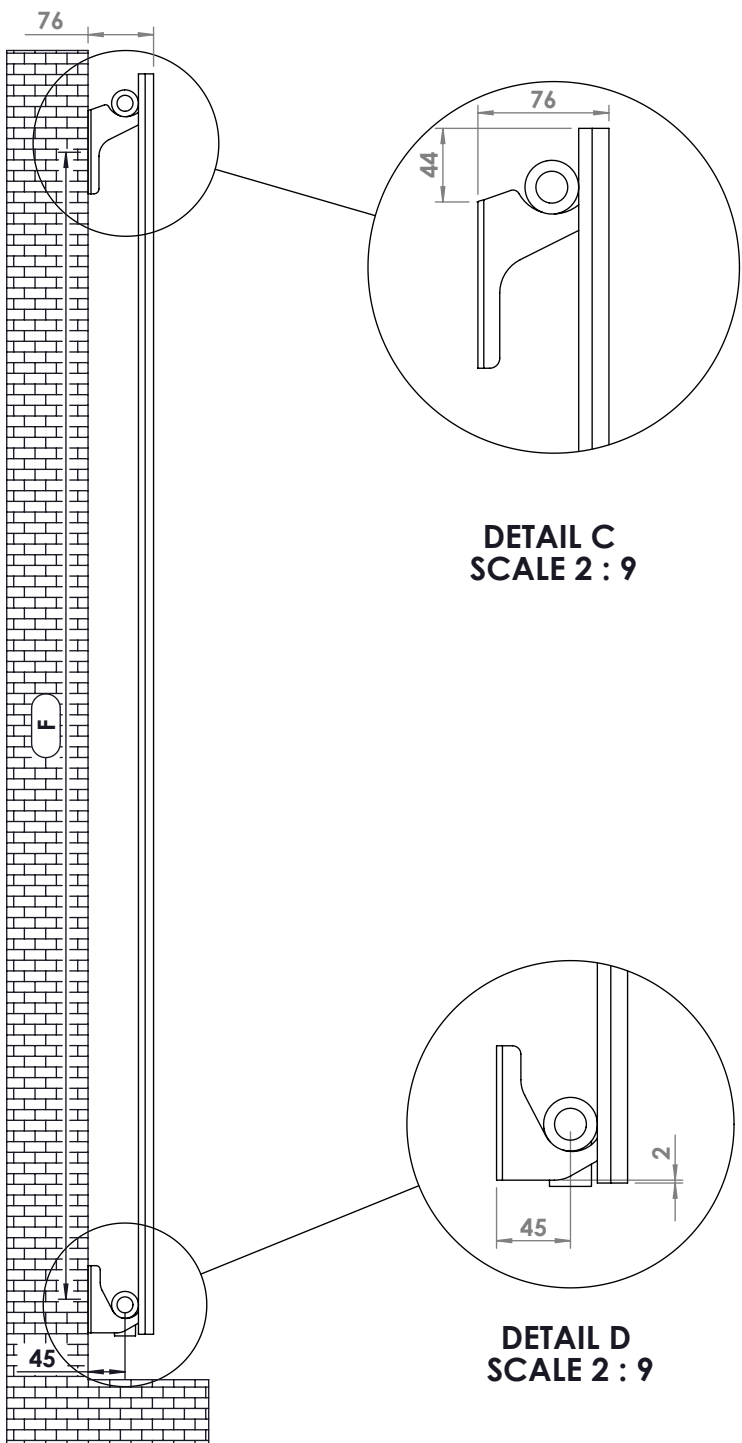


Side View

DETAIL C
SCALE 2 : 9


DETAIL D
SCALE 2 : 9

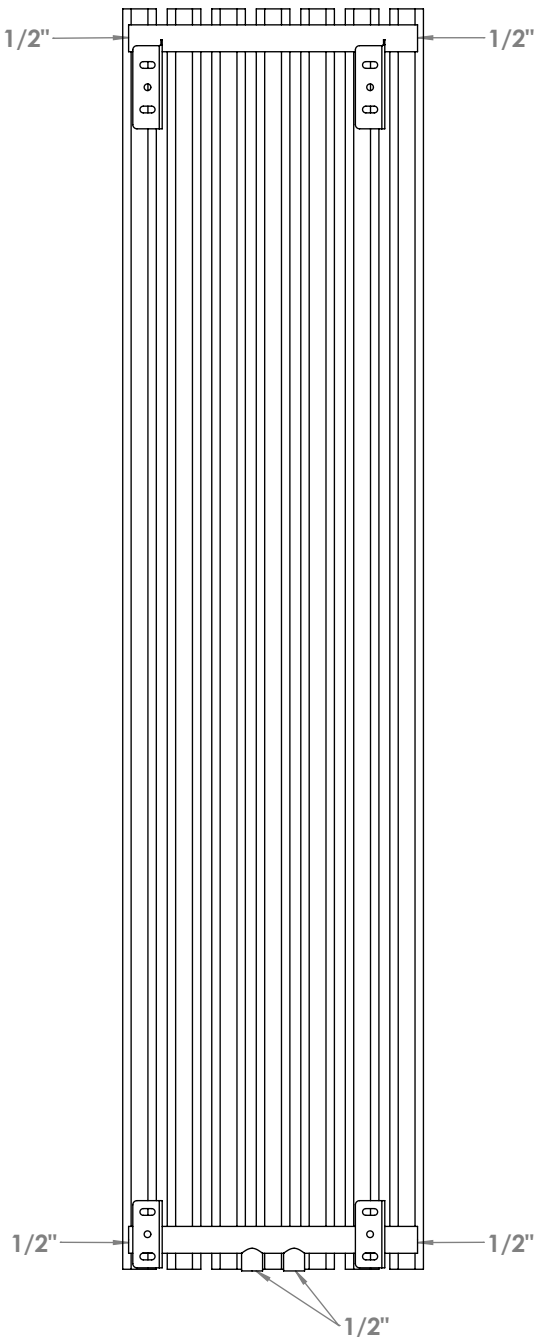

Back View

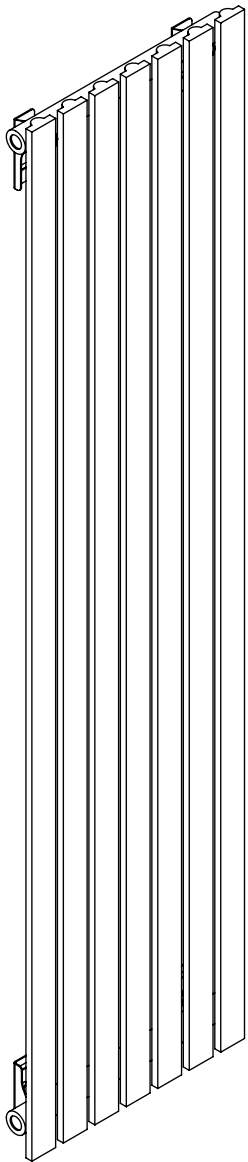


Plumbing Position:
Vertical

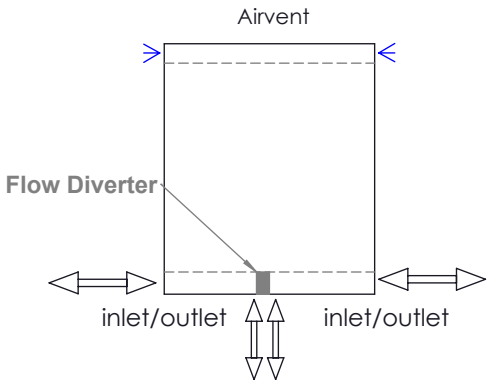

When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

Installation Accessories:

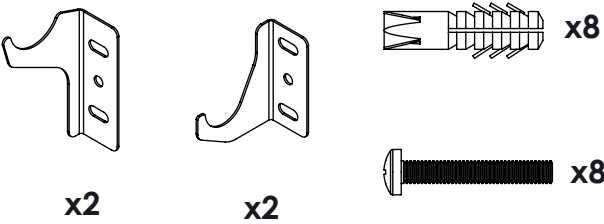

Vertical mount
All Dimensions are in mm
Max.Working Pressure: 10 Bar
Max.Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel : E/H/D

PRODUCT CODE	Height	Length	Depth	Pipe Centres	Bracket Centres	
	H	L	D	C1-C	F	S
	mm	mm	mm	mm	mm	mm
LS1505	1500	252	50	50-328	1372	159
LS1507	1500	358	50	50-434	1372	265
LS1509	1500	464	50	50-540	1372	371
LS1805	1800	252	50	50-328	1672	159
LS1807	1800	358	50	50-434	1672	265
LS1809	1800	464	50	50-540	1672	371
LS2005	2000	252	50	50-328	1872	159
LS2007	2000	358	50	50-434	1872	265
LS2009	2000	464	50	50-540	1872	371